



(Maximum Working Pressure:30 bar)


MODEL	Connectors			L (mm)	Weight (kg)
	A1	A2	B1,B2	10.0+1.85*N	3.00+0.154*N
R095 * H 30 C-S79G8	I.D. 28.80	I.D. 22.36	G 1" B	65.50	7.62
R095 * H 40 C-S79G8	Soldered	Soldered	Male Thread	84.00	9.16
R095 * H 50 C-S79G8				102.50	10.70

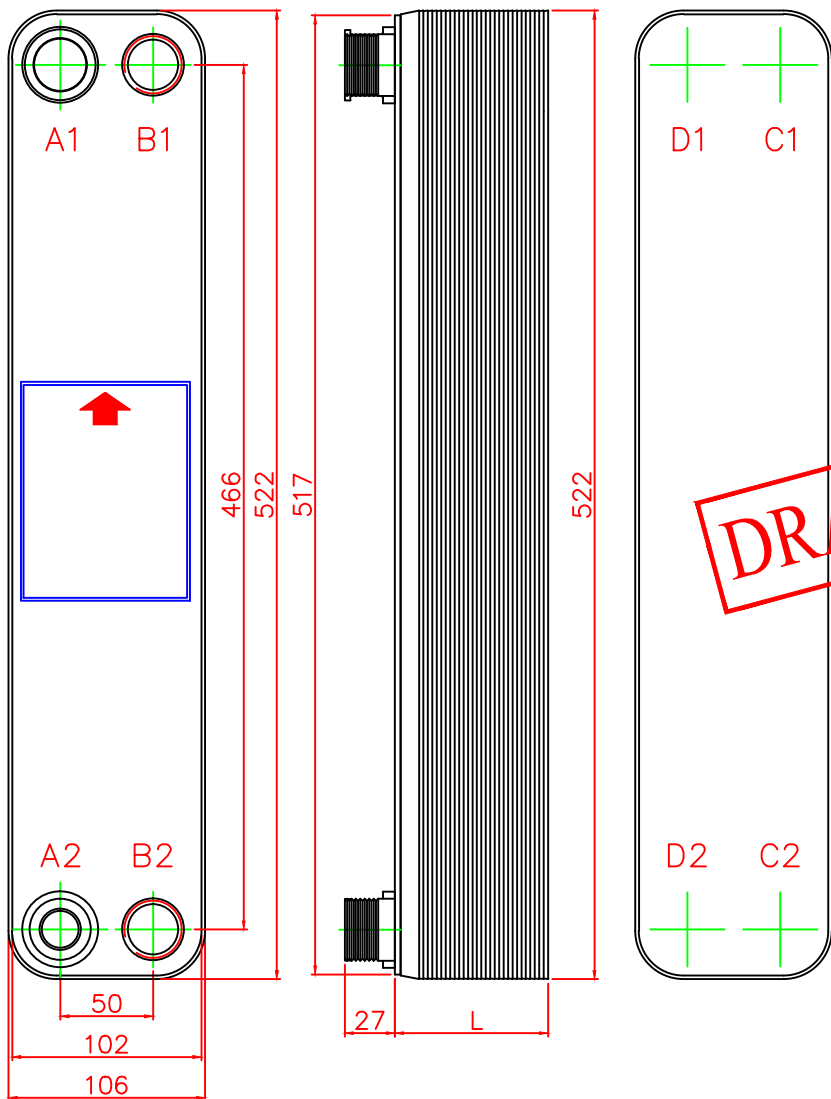


**DRAFT**




A1



A2



B1, B2



NO.	Part Name	Material	Quantity
1	Upper cover plate	SUS 304	1
2	Bottom cover plate	SUS 304	1
3	Upper seal plate	SUS 304	1
4	Bottom seal plate	SUS 304	1
5	Connector	SUS 304	4
6	Chevron plate	SUS 316	N

UNIT: mm

**KAORI**  
高力熱處理工業股份有限公司  
KAORI HEAT TREATMENT CO., LTD.

DESIGN	DRAW	CHECK	APPROVE	SCALE:
課長 2017.06.07 葉晉瑞	PHE 2017.06.07 姚紫瑛	課長 2017.06.07 葉晉瑞	經理 2017.06.07 林岳宏	☉

R095 BHE Dimension  
R095\*HNC-S79G8

REVISION	DATE	REVISER	NOTE
5			
4			
3			
2			
1			